



FlexScan® EV2360

22.5" (57.2 cm) LCD Monitor



Small Footprint, Large Work Space

High Resolution in a Space-Saving Design

The EV2360 uses a 22.5-inch IPS panel – the smallest amongst EIZO’s frameless models. The small-footprint monitor has a width of just 499 mm and a high native resolution of 1920 x 1200. It shows 11% more content than a conventional monitor with a full HD (1920 x 1080) resolution, reducing the need for frequent scrolling in some applications.

Low Impact on the Environment


The EV2360 implements EIZO’s proprietary EcoView technologies, which cut power consumption by as much as 40% compared to displaying at maximum brightness and help to eliminate eyestrain when viewing the monitor for long periods.

- Adjusts screen brightness according to ambient lighting
- Adjusts backlight brightness and gain when displaying dark content

As part of its efforts to maintain environmentally responsible manufacturing, EIZO developed the monitor without flame retardant in the plastic body to improve recyclability and uses recyclable packing for the boxes the monitor is shipped in.

Rest Assured with Major Sustainability Standards

The monitor is certified by major comprehensive sustainability standards such as TCO Certified Generation 8, EPEAT, and EnergyStar. Organizations concerned with ESG investments or SDGs can assuredly procure the monitor to meet required guidelines.



FlexScan® EV2360

Refreshing White with Frameless Design

The EV2360 comes with a white cabinet option with matching cables. Compared to black, white monitors offer a refreshing change that brightens the office with style. The frameless design further sophisticates the look.




The Perfect Position

The stand features wide range height adjustment, tilt, and swivel, while saving space and remaining stylish. You can adjust your monitor to the perfect position with ease.



Take Your Settings with You

EIZO's Screen InStyle proprietary software's Color Briefcase allows you to effortlessly maintain your individual screen preferences and take them with you, even to different monitors. Your settings are automatically reflected simply by connecting your laptop to a monitor supported by Screen InStyle. This is useful in environments with hot-desking or shared workspaces, providing enhanced comfort and work efficiency.

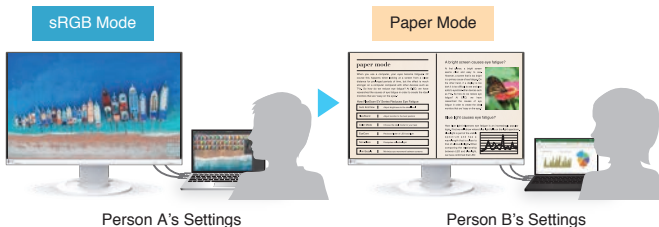

Say Goodbye to Tired Eyes

The EV2360 is equipped with functions to prevent eye fatigue even over long periods of use. With reduced eye fatigue, concentration increases, leading to improved productivity.

- Auto brightness control
- 80% blue light reduction
- Anti-glare screen
- Flicker-free screen



Free Up Your Workspace with a Stand Bracket

The PCSK-03R is an optional VESA-compliant bracket for easily mounting a mini PC to the back of the monitor's stand to save work space on your desk.


Specifications

Model Variations	with Stand	black / white	EV2360-BK / EV2360-WT
	without stand	black / white	EV2360-FBK / EV2360-FWT
Panel	Type / Backlight	IPS / LED	
	Size	22.5" / 57.2 cm	
	Native Resolution	1920 x 1200 (16:10 aspect ratio)	
	Viewable Image Size (H x V)	488.2 x 297.2 mm	
	Pixel Pitch / Pixel Density	0.254 x 0.248 mm / 101 ppi	
	Display Colors	16.77 million	
	Viewing Angles (H / V, typical)	178° / 178°	
	Brightness (typical)	250 cd/m ²	
	Contrast Ratio (typical)	1000:1	
Response Time (typical)	5 ms (gray-to-gray)		
	Input Terminals	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), D-Sub mini 15 pin	
Video Signals	Digital Scanning Frequency (H / V)	DisplayPort: 31 - 75.5 kHz / 59 - 61 Hz HDMI: 31 - 75.5 kHz / 49 - 51 Hz, 59 - 61 Hz	
	Analog Scanning Frequency (H / V)	31 - 75.5 kHz / 59 - 61 Hz	
	Sync Formats	Separate	
	USB	Upstream	USB 3.1 Gen 1: Type-B
USB	Downstream	USB 3.1 Gen 1: Type-A x2	
	Audio	Speakers	1.0 W + 1.0 W
Audio	Input Terminals	Stereo mini jack, DisplayPort, HDMI	
	Output Terminals	Headphones (Stereo mini jack)	
	Power	Power Requirements	AC 100 - 240 V, 50 / 60 Hz
Power	Typical Power Consumption	11 W	
	Maximum Power Consumption	37 W	
	Power Save Mode	0.5 W or less	
	Features & Functions	Preset Modes	Color mode (User1, User2, sRGB, Paper, Movie, DICOM)
Auto EcoView		Yes	
OSD Languages		English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	
Physical Specifications	Dimensions (Landscape, W x H x D)	499 x 333.9 - 473.9 x 233 mm	
	Dimensions (Portrait, W x H x D)	321.3 x 510.5 - 569.5 x 233 mm	
	Dimensions (Without Stand, W x H x D)	499 x 321.3 x 53.6 mm	
	Net Weight	5.5 kg / 3.4 kg (Without Stand)	
	Height Adjustment Range	140 mm	
	Tilt / Swivel / Pivot	35° Up, 5° Down / 344° / 90° (both clockwise and counter clockwise)	
	Hole Spacing (VESA Standard)	100 x 100 mm	
Environmental Requirements	Operating Temperature	5 - 35 °C	
	Operating Humidity (R.H., non condensing)	20 - 80 %	
Certifications & Standards (Please contact EIZO for the latest information.)	TCO Certified Generation 8, EPEAT 2018 (US), TÜV Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC		
Dedicated Software	Monitor Control Utility	Screen InStyle Supported	
Supplied Accessories (May vary by country. Please contact EIZO for details.)	Signal Cables	DisplayPort (2 m)	
	Others	AC power cord (2 m), USB cable (2 m), Screw for VESA mount x4, setup guide	
Warranty	Five Years *		

*Usage time is limited to 30,000 hours. Free from bright sub-pixels for 6 months from the date of purchase.

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.

Dimensions (Unit : mm)

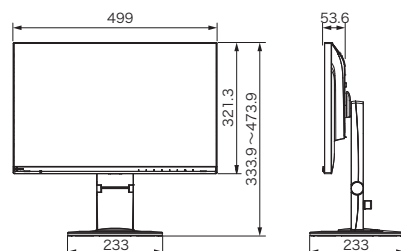

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan

Phone: +81-76-277-6794 Fax: +81-76-277-6793

www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, and FlexScan are registered trademarks of EIZO Corporation in Japan and other countries. Screen InStyle is a trademark of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. VESA is a registered trademark of Video Electronics Standards Association. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.