

SPECIFICATION SHEET



USB-C To VGA Video Adapter Converter With Power Delivery

- Connect to an external display with VGA while charging a USB-C equipped mobile device
- Supports up to 1920x1200 resolution
- Reversible, symmetrical USB-C connector
- Plug and play no drivers required
- 3 year warranty

Specifications: USB-C To VGA Video Adapter Converter With Power Delivery

Electrical Specifications:

Voltage Rating:	30V
Conductor Resistance:	34AWG 856.3Ω/km at 20°C
Insulation Resistance:	10m-km/min at 20°C DC 500V (EIA-364-21)
Dielectric Strength:	AC 500V/1 minute No breakdown (EIA-364-20)
USB-C Female Supplied Power:	60W (20V/3A)

Physical Specifications:

Operation Temperature:	0°C - 50°C; 15-85% RH (Non-Condensing)
Storage Temperature:	-25°C - 70°C; 15-85% RH (Non-Condensing)
Jacket:	PVC
Outer Diameter:	3.9 ± 0.1mm
Shield	Braid 16/9/0.06(TC)

Conductor 1: (2 Conductors, 4 Pair)

Conductor	34 AWG 7/.06(TC)
Insulation:	0.42 (HD-PE)
Shield:	Aluminum Mylar
Color	P1 White / Brown P2 White / Red P3 White / Green P4 White / Blue


Conductor 2: (2 Conductors)

Conductor	28 AWG 7/.127(TC)
Insulation:	0.70 (HD-PE)
Color	Red Black

Conductor 3: (6 Conductors)

Conductor	34 AWG 7/.06(TC)
Insulation:	0.42 (HD-PE)
Color	White Green Brown Yellow Blue Orange

Specifications: USB-C To VGA Video Adapter Converter With Power Delivery

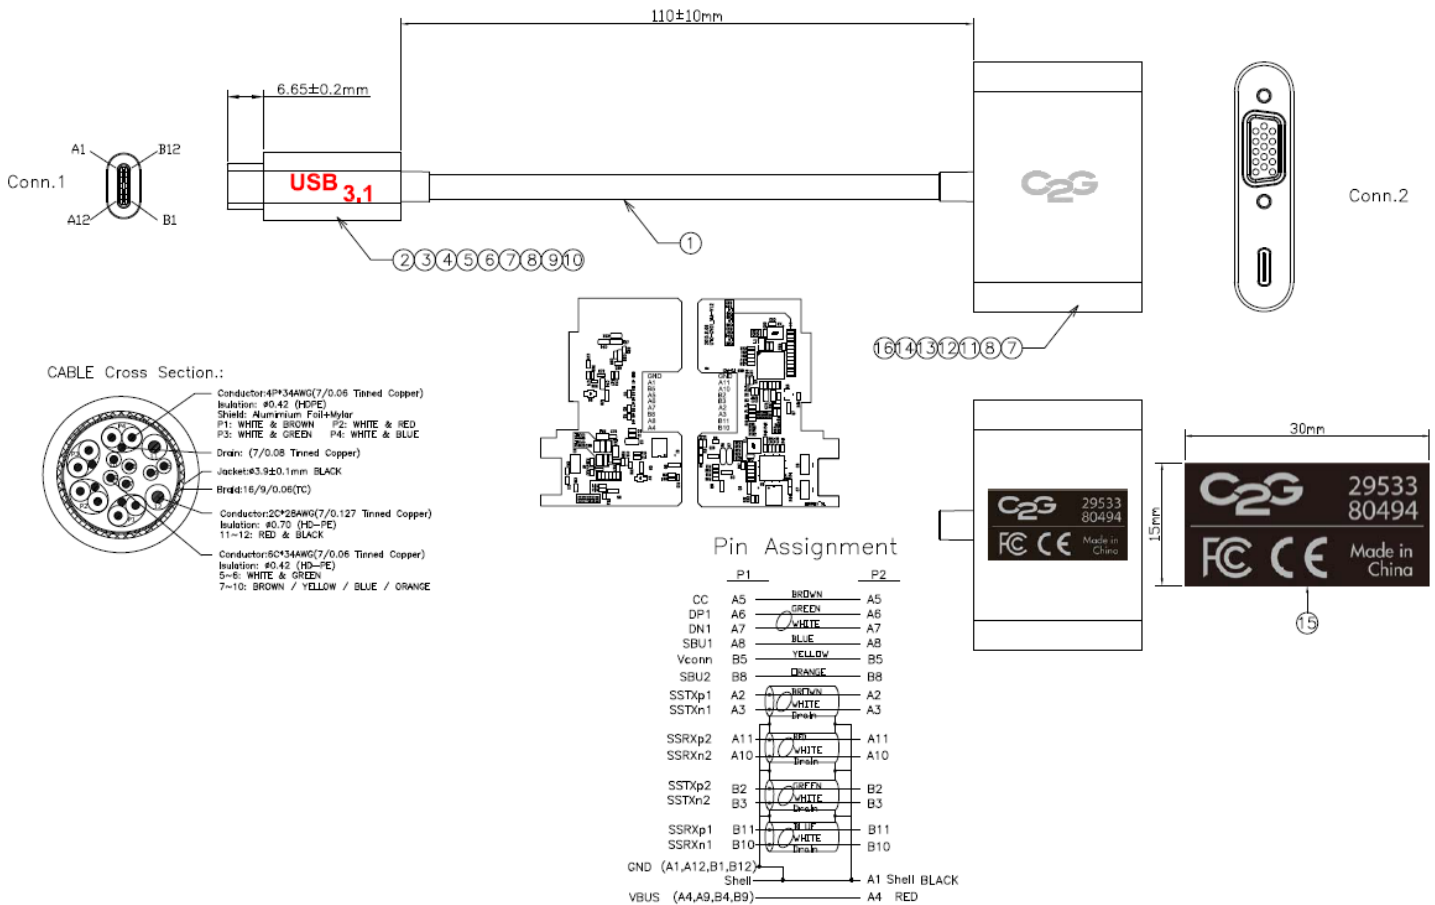

Part Number	Description	Weight (lbs)
29533	USB-C to VGA Video Adapter Converter With Power Delivery-Black	0.78
29534	USB-C to VGA Video Adapter Converter With Power Delivery-White	0.78



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

