



DATA SHEET

Thunderbolt™ 3 USB-C® Dual Display Docking Station

Deliver Audio/Video content to two 4K displays from a USB-C device while transmitting data and simultaneously charging the device

OVERVIEW

The Thunderbolt 3 USB-C Dual Display Dock connects to Thunderbolt 3 enabled laptops and features 135W of power, making it ideal for commercial workstation laptops that need more video outputs, more connected peripherals, and the ability to transfer data while staying charged.

This Thunderbolt 3 USB-C Dual Display Docking Station offers 135W to support connected devices, such as keyboards, mice, portable hard drives, and other peripherals, all while supporting up to 60W of power delivery to charge and power a commercial workstation laptop when using the USB-C power adapter that is included with the laptop. The maximum power capacity depends on how much power the connected adapter can supply. The right amount of power is necessary to keep the laptop battery charged, for all connected devices to function, and for the dock to provide that connectivity. Laptops or tablets that require more than 135W may charge at lower speeds.

Supporting two displays with resolutions up to 4K (3840 x 2160) at 60Hz for high definition images and video makes this docking station a perfect desktop solution. The USB-A ports support SuperSpeed USB 5Gbps data transfers—allowing up to 32GB of data to be downloaded in under a minute. The Thunderbolt 3 ports support data transfers up to 40Gbps—8x faster than SuperSpeed USB 5Gbps. The Ethernet port allows for reliable internet connectivity with file transfer speeds up to 1000Mbps. Access multimedia content quickly with the SD 3.0 card reader that supports SD, SDHC and SDXC up to 128GB. Optimize performance by connecting displays designed for 4K 60Hz signals, USB devices designed for 5Gbps transfer speeds and Thunderbolt 3 enabled devices.

FEATURES

- **4K HDMI:** Connect to a 4K display via the HDMI port.
- **1x Thunderbolt 3 Power and Data:** Connect to a 4K display and transfer data up to 40Gbps from a storage device.
- **1x Thunderbolt 3 Power and Data:** Transfer data up to 40Gbps from a storage device and power a commercial laptop with up to 60W power delivery.
- **3x USB-A:** Connect storage devices and transfer data up to 5Gbps through the USB-A ports.
- **1x USB-A with BC 1.2:** Connect storage device and transfer data up to 5Gbps through the USB-A port. This port supports BC 1.2 for enhanced mobile device charging.
- **Gigabit Ethernet:** Connect to local network for network and internet access.
- **Combo Audio Jack:** Connect headphones, speakers, and headphone/microphone sets for audio output and input.
- **SD 3.0 Card Reader:** Insert SD memory card for data transfer.

ITEM	DESCRIPTION
------	-------------

C2G80933	Thunderbolt 3 USB-C Dual Display Docking Station
----------	--

FEATURES

- Supports HDMI display resolutions up to 4K (3840 x 2160) at 60hz
- Supports Thunderbolt 3 display resolutions up to 4K (3840 x 2160) at 60Hz
- Thunderbolt 3 port supporting 40Gbps data transmission or a max 60W power delivery
- Five USB-A ports supporting 5Gbps data transmissions
- One USB-A port also supports BC 1.2 for enhanced mobile charging
- RJ45 Gigabit Ethernet Port
- Secure Digital (SD) 3.0 Card Reader
- Power delivery to charge a laptop, tablet, or smartphone
- Compatible with USB-C and Thunderbolt[™] 3 ports
- Reversible, symmetrical USB-C connector
- Desktop form factor

ELECTRICAL SPECIFICATIONS


- Input Vptage: 100 ~ 240AC
- Output Current: 6.75A
- Output Voltage: 20V DC
- Power Consumption: 135W
- USB-C Power Delivery: 60W
- Power Source: AC Adapter included

PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to 35°C
- Storage Temperature: -20°C to 70°C
- Operating Humidity: 0% to 80% RH (Non-Condensing)
- Storage Humidity: 0% to 80% RH (Non-Condensing)

PHYSICAL CHARACTERISTICS

- Connector 1: DC Jack: 6.0 * 2.5mm
- Connector 2: HDMI: Female 19 pin SMT Type
- Connector 3: USB Type-C: 40Gbps USB-C for Thunderbolt
- Connector 4: SD Card: SD Push Gold Flash
- Connector 5: RJ45: Green / Yellow 8P8C for 1000Mbps
- Connector 6: Audio: 3.5mm Jack 6 * 3.6mm
- Connector 7: USB Type-A: Female Connector, Pin Gold Flash 30UM; Thermal plastic Blue
- Material Housing: ABS + PC, Aluminum
- Dimensions (HxWxL): 27mm x 230mm x 87.3mm (1.06 inch H x 9.05 inch W x 3.44 inch L)
- Power Adapter Cable Length: 1800mm
- Power Adapter Pin Diameter: OD = 5.5mm, ID = 2.5mm
- Power Adapter Center Pin Polarity: Positive
- Power Adapter Power Efficiency: VI
- Certifications: FCC, CE

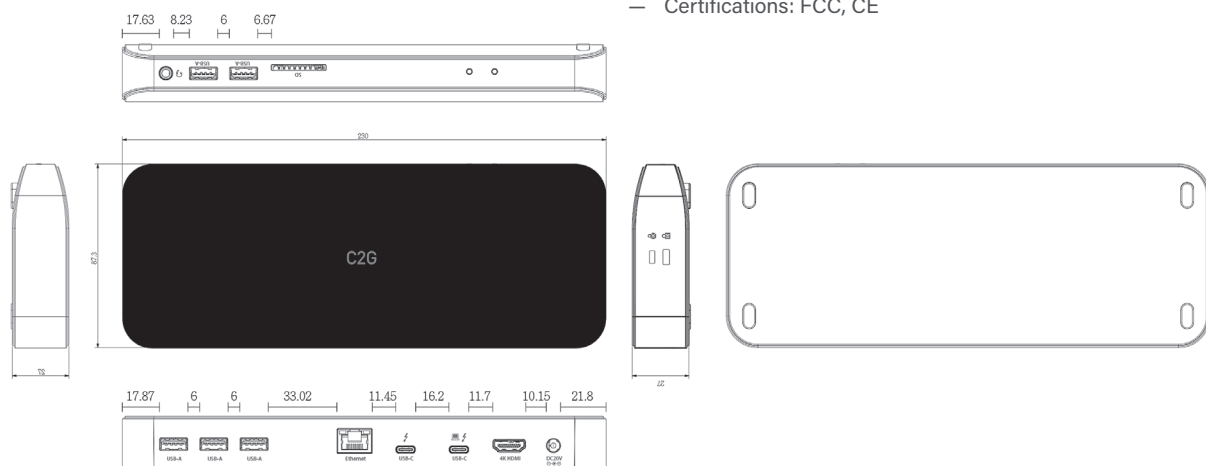

C2G

c2g.com/uk | legrandav.com

EMEA P +31 495 580 840 E c2g.emea@av.legrand.com

©2021 Legrand AV Inc. 210166 Rev A 3/21 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

A brand of **legrand**

COMMERCIAL AV BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold